




TYPE 1

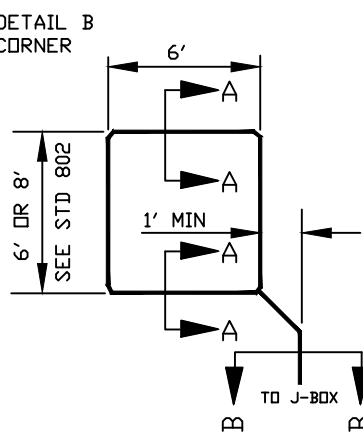


TYPE 2

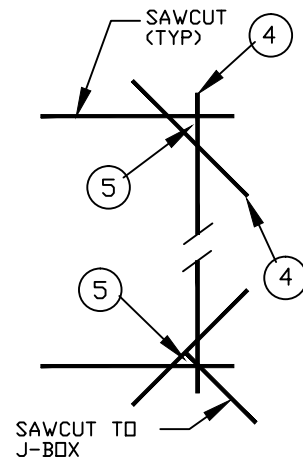

DETAIL B




SECTION A-A




SECTION B-B

NOTES

- ① SEALANT - CRAFCO PART NO 34271
- ② LOOP WIRE - NUMBER VARIES SEE LOOP WINDING DETAILS BELOW.
- ③ LEAD-IN WIRES: ONE PAIR FOR EACH LOOP SERVED, 3 PAIR MAX PER SAWCUT SEE INSTALLATION NOTES.
- ④ EXTEND SAWCUT SUFFICIENT LENGTH TO PROVIDE FULL SAWCUT DEPTH AROUND CORNERS.
- ⑤ LOCATE CORNER SAWCUT AT 45° TO SIDE CUTS AND SO AS TO PREVENT KINK IN LOOP WIRE AND ALSO MINIMIZE VOID. TRIANGULAR VOID WILL BE REMOVED AND FILLED WITH SEALANT.

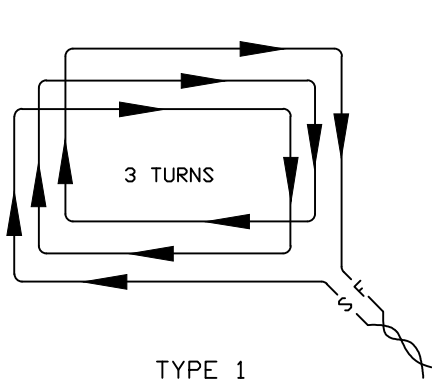

TYPE 1

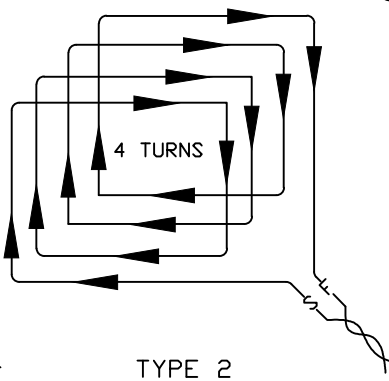

TYPE 2

LOOP WINDING DETAILS

FOR ADDITIONAL INFORMATION SEE STD DWG 8-7 & 8-9